


# Retention Tanks

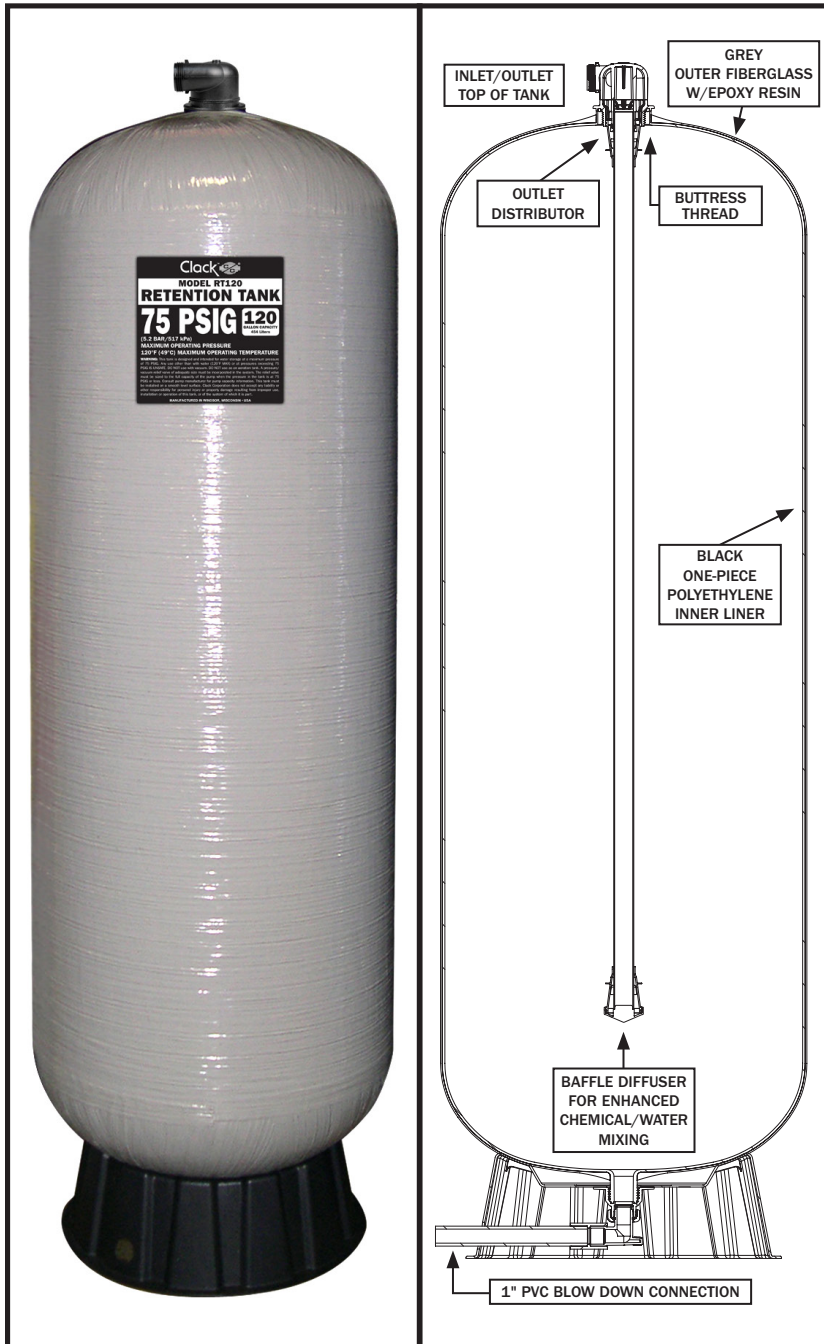

**ALL PARTS INCLUDED AS SHOWN**

## FEATURES:


- Convenient Inlet/Outlet piping connection at the top of the tank
- Inlet/Outlet Adapter easily accommodates the use of a vacuum breaker
- Inlet/Outlet Buttress thread for strength
- Bypass valve option available
- Full 1" blow down drain at lowest point of tank
- 360° degree drain orientation
- Black one piece polyethylene liner for impact and corrosion resistance
- 5 year limited warranty
- Made from NSF listed and/or FDA compliant materials

## SPECIFICATIONS:

- Maximum Operating Pressure 75 psi/517 kPa
- Maximum Operating Temperature 120°F 49°C
- Maximum Allowable Operating Vacuum 0
- A Vacuum/Pressure Relief Valve of adequate size must be incorporated in the plumbing

## FITTINGS INCLUDED:

- 1¼" x 1½" PVC Straight Solvent Fitting Kit and
- 1¼" Plastic Straight Male NPT Fittings

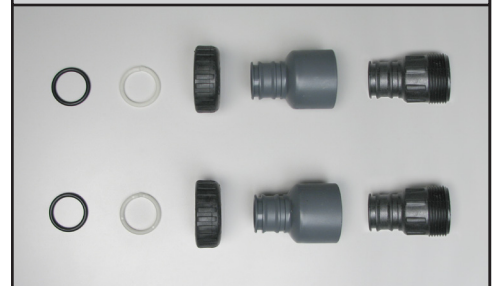

## OPTIONAL:

**Bypass**



**Order No. V3006**

ORDER NO.	DESCRIPTION	TANK ASSEMBLY DIAMETER INCHES/MM	TANK ASSEMBLY HEIGHT INCHES/MM	CAPACITY GALLONS/LITERS	QTY/CARTON	SHIPPING WEIGHT LBS/KG
C2250	RT40 Retention Tank	21/533	40.5/1,029	40/151	1	37/17
C2251	RT80 Retention Tank	21/533	67.5/1,715	80/303	1	66/30
C2252	RT120 Retention Tank	24/607	78.5/1,994	120/454	1	80/36

ORDER NO.	DESCRIPTION	QTY/CARTON	SHIPPING WEIGHT LBS/KG
V3006	Bypass	24	26/12